

INSTRUCTIONS

Thank you for purchasing the CODi Universal AC Plug Adapter™. This unique adapter now makes it convenient for you to connect your devices to almost any AC power source in the world without having to add a country specific pass-through adapter.

The CODi Universal AC Adapter™ comes equipped with a patented integrated World AC plug that allows you to use your AC adapter around the world: Asia, Australia, China, Europe, New Zealand, North America, South America, and the U.K.

CAUTION: THIS DEVICE DOES NOT CONVERT VOLTAGE. Please make sure the device you are connecting matches the voltage reading on the country's wall outlet. The United States standard is 110 Volts whereas Europe is 220 Volts.

Most computer power adapters are auto-switching and will display a range of voltages on the A/C adapter, for example, "Input: AC100-240V~".

If you are not sure if your adapter is auto-switching please make sure to check that the voltage of your device matches the plugs output before plugging it in.

I. North America

- A. Locate the black button/latch (1) above the CODi® logo and click upwards, locking the North American/Australian plugs in a 90 degree position.




Fig. A

- B. Insert the North American plug into the wall outlet. Make sure the European Tips (3) are firmly connected to the open round slots opposite of the North American plugs. (See pictures below for correct (Fig. A1) and incorrect (Fig. A2) examples.) You are now ready to plug any portable device from around the world into the open slots provided on the opposite side of the adapter. (2)

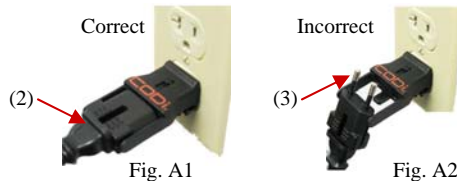


Fig. A1

Fig. A2

II. Australia/New Zealand

- A. Locate the black button/latch above the CODi® logo and click downwards (4), locking the North American/Australian plugs in a 45 degree position.




Fig. B

- B. Insert the Australia/New Zealand plug into the wall outlet. Make sure the European Tips are firmly connected to the open slots opposite of the Australian/New Zealand plugs. (See correct (Fig. A1) and incorrect (Fig. A2) examples in North America instructions). You are now ready to plug any portable device from around the world into the open slots provided on the opposite side of the adapter. (2)

III. Europe/Asia

- A. Grasp the adapter at opposite ends and pull to remove the European Tips. (Fig. C) Rotate the Euro Plug 90 degrees, (Fig. D), and insert the Euro Plug into the wall outlet. You are now ready to plug any portable device from around the world into the open slots opposite the European Tips. NOTE: Be careful not to fully detach the Euro Plug. It should remain attached as shown in Fig. D. If you happen to detach the Euro Plug, simply reinsert the two pins on the inside arms back into the grooves on the sides of the Euro Plug.



Fig. C



Fig. D

IV. United Kingdom

- A. Push the UK Key (5) down until you hear a "click" and remove it from the adapter. (see Fig. E and Fig. F)

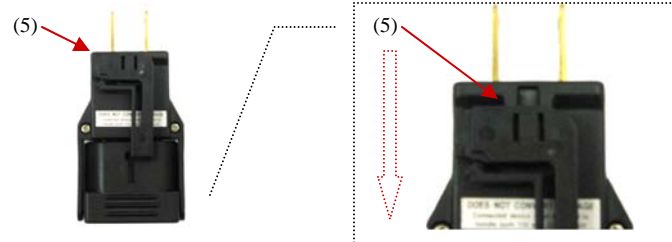


Fig. E

Fig. F

- B. Separate Euro Plug. (See Europe/Asia section III A.)
C. Attach the UK Key (5) to the connection slot (6) on the bottom of the Euro Plug. (see Fig. G & Fig. H) Insert the plug into the wall outlet. You are now ready to plug any portable device from around the world into the open slots on the opposite side of the Euro Plug.




Fig. G



Fig. H

NOTE: See reverse side for Country Reference Sheet

ASIA	
Country	Code
Taiwan	A
Hong Kong	B
Mainland China	A, B, C, D
Macao	B
Korea	A, B, C
Japan	A
Phillippines	A, B, C
Vietnam	A, B
Singapore	D
Indonesia	B
Malaysia	D
Brunel	B, D
Thailand	A, B, D
India	B
Napal	B
Bangladesh	B
Pakistan	B

EUROPE	
Country	Code
The Netherlands	B
Belgium	B
Luxembourg	B
Germany	B
France	B, C
Denmark	B
Finland	B
Norway	B
Sweden	B
Switzerland	B
Austria	B
Hungary	B
Czechoslovakia	B
Poland	B
U S S R	A, B
Romania	B
Bulgaria	B
Yugoslavia	B
Greece	B
Italy	B
Spain	A, B
Portugal	B
U.K.	C, D
Haiti	D

NORTH & SOUTH AMERICA	
Country	Code
U.S.A.	A
Alaska	A
Mexico	A
Costa Rica	A, D
Nicaragua	A
Venezuela	A
Bolivia	A, B
El Salvador	A
Colombia	A
Guatamala	A
Argentina	B, D
Uruguay	B, D
Paraguay	B
Brazil	A, B
Peru	A, B
Chile	B
Panama	A
Belize	A, D
Cuba	A, B, D
Dominican Republic	A

MIDDLE EAST	
Country	Code
Japan	B, D
Iran	B, D
Iraq	B, D
Turkey	B
Kuwait	B, D
Saudi Arabia	A, B, D
The United Arab Emirates	B, D

AUSTRALIA / NEW ZEALAND	
Country	Code
Australia	C
New Zealand	C
Fiji	C
Tahiti	A

AFRICA	
Country	Code
Egypt	B, D
Kenya	B, D
Zambia	D
Morocco	B
Mauritania	B, D
Nigeria	D
R. S. A.	B, D

NOTE: 1. Please refer to country numbers I, II, III, and IV in your user manual

- CODE A = Country I
- CODE C = Country II
- CODE B = Country III
- CODE D = Country IV

NOTE: 2. Please check local voltage and plug configuration prior to use.

Certifications: CE
 Dimensions: 3.25" x 1.5" x 13/16"
 Weight: 0.8 oz.
 Input Voltage - 100 to 240 VAC